

## CHIMNEY SWEEPING PLATFORM

### 1. Picture of the product



Figure 1. Before



Figure 2. After

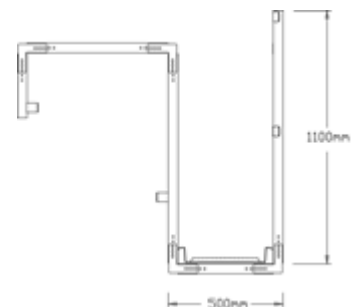


Figure 3. Cross-section of the platform

### 2. Product description

According to Nat. Building Code F2, safe access must be provided to maintenance objects, such as chimneys, and it must be possible to sweep the chimney easily and safely. Attaching chimney sweeping platforms steadily to only the side of the chimney is often difficult. Our chimney sweeping platform solution can be fixed steadily even to complex pipes. The chimney sweeping platform is made of hot-dip galvanised steel and powder-coated and, therefore, it is resistant to corrosion even in challenging conditions. Acid-proof screws are recommended for attaching.

The fixtures have pre-drilled holes for inserting the 45 x 25 mm handrail tube. Snow guard tube, for example, can be used as a handrail. The handrail tubes are fixed on the side of the fixture at the end with an M8 x 40 mm hexagonal screw and an M8 nut. The chimney sweeping platform is suitable for 500 mm wide chimneys with maximum 70 mm

widening at the top; other dimensions are made to order. Standard dimensions: railing height 1,100 mm, access platform width 350 mm. Chimney sweeping platform fixtures are installed at max. 900 mm intervals.