

ROOF LADDER

1. Picture of the product



Figure 1. Metal sheeting or bitumen roof seam roof and Classic roof



Figure 2. Tile roof

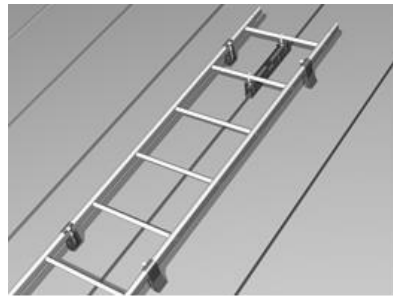


Figure 3. Standing

2. Product description

The roof ladders are designed, manufactured and tested according to the requirements of SFS-EN 12951, class 2. Meeting these requirements requires the products to be painted even though the amount of zinc is 350 g/m² (= 25 µm).

Class 2 roof ladders can be used as safety line anchor points on the following roofs: metal multi-tile roofing and corrugated steel roofing (roof batten thickness min. 22 mm), standing seam roofs, snap-lock profile roofs, Classic roofs, tile roofs and bitumen roofs.

The EVO ladder frame lengths are 1.8 m, 2.4 m, 3.0 m and 4.2 m, and they can be extended.



CE
Nesco Oy Teollisuustie 8 FI-16300 ORIMATTILA
13 EN 12951
Fixed roof ladders C2-TB
DoP: nesco.fi